Main Technical Specification	
Ranges	400-480MHz
Channel numbers	16 channels
Operating voltage	7.4V
Operating temperature	-30℃ ~ +50℃
Operating mode	Co-channel or Dis-channel Simplex
Output power	5W/1W
Modulation	FM(F3E)
Maximum deviation	≤±5KHz
Spurious radiation	< -60dB
Frequency stability	±5ppm
Receiving sensitivity	<0.2μV
Audio output power	≥500mW

- CTCSS/DCS掃描功能
- 耐震、抗潮濕、IP-65防水
- 長效能大容量2000mAh鋰電池
- 長待機，約10~12小時
- TYPE-C充電，K型耳機座

Wouxun
Professional Two Way Radio Manufacturer

KG-C58

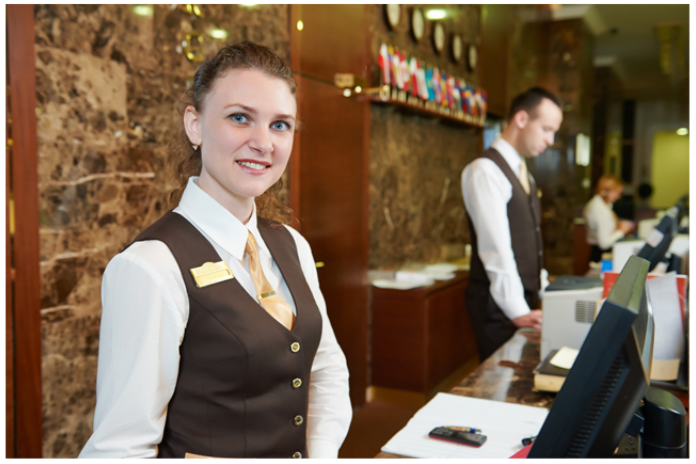

Professional Two Way Radio

選購配備:
六槽充電座

INPUT:12V;8A
OUTPUT:8.4V;800mA